

STATIONARY HYDROSTATIC

1200TSH & 1400TSH Rear Door

1200TSH STATIONARY

Dimensions

Height w/24" Pedestals: 122" / 310cm
 Height w/ 10" Extension: 132" / 335cm
 Overall Width: 102" / 259cm
 Overall Length: 326" / 828cm

Max Payload 40,000lbs / 18,144kg

Empty Weight 11,838Lbs / 5,370kg


Unit Capacity

Struck Capacity: 917cu.ft. / 26m³
 Capacity with Extension: 1038cu.ft. / 29.4m³

Minimum Power Requirements

200hp / 149kW

1200T STATIONARY

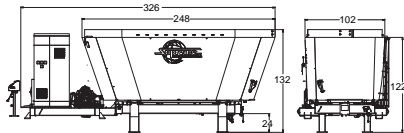

1400TSH STATIONARY

Dimensions

Height w/24" Pedestals: 128" / 325cm
 Height w/ 10" Extension: 138" / 351cm
 Overall Width: 121" / 307cm
 Overall Length: 334" / 848cm

Max Payload 40,000lbs / 18,144kg

Empty Weight 27,614Lbs / 12,526kg


Unit Capacity

Struck Capacity: 1157cu.ft. / 32.8m³
 Capacity with Extension: 1312cu.ft. / 37.2m³

Minimum Power Requirements

250hp / 186kW

1400T STATIONARY

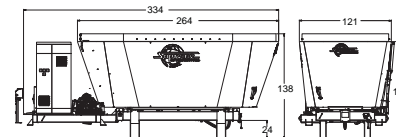

Standard Equipment

- 2 Patented Freestanding Vertical Cutting Augers
- Manual Restrictor Plates
- 100% Hydrostatic Drive System
- 10 Replaceable Forage Cutting Blades
- Ultra Wear Kicker Plates
- Rear Discharge Doors
- 1 1/2" MS Floor
- 1/4" 6mm AR200 Wall
- 5/8" 16mm AR200 Auger Flighting
- Scale System
- Tub Mounted Weight Repeater
- Electronic Auger Speed Control
- On Board Pressure & Temperature Monitoring
- High Pressure Shut Down
- High Temperature Shut Down
- Low Oil Shut Down
- Steel Oil Tanks Reservoir

HYDROSTATIC STATIONARY

